



XT.7

PNEUMATIC BRAKE






- ✓ New generation brake
- ✓ Long life span, 7 years
- ✓ Unmatched performance
- ✓ Very compact dimension
- ✓ Respect for the environment
- ✓ Easy installation
- ✓ Innovative technology
- ✓ Fully patented, design and technology

EXtreme, is the new and revolutionary mono disc pneumatic brake designed to reach unmatched performance, very compact size and respect for the environment to guarantee the customer's success.

EXtreme is fully patented, all the details of the brakes have been studied to improve the efficiency: the housing and the disc have been designed to increase the cooling of the brake and to guarantee a compact size; the caliper and the pads have been designed to guarantee a very long life span, almost zero maintenance costs and respect for the environment and the operator's health.


EXtreme XT.7 is the smallest of the family: in 205mm of diameter and 123mm of thickness, it can reach 2 kW of heat dissipation and 300 Nm of torque.

For this features, it is usually used narrow web machines and all applications that require a precise and linear control of the web tension both at low and high torques

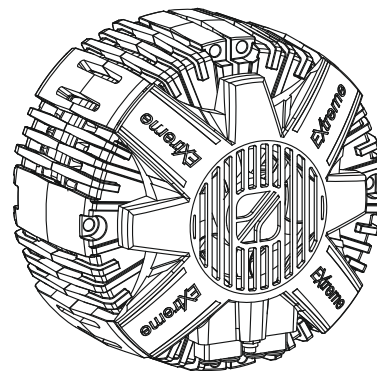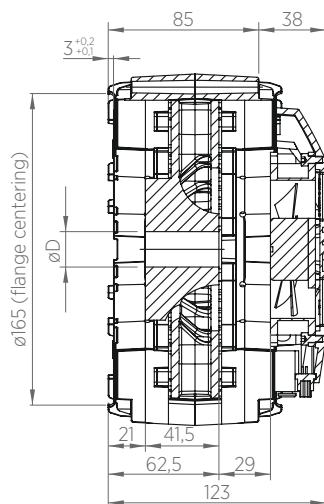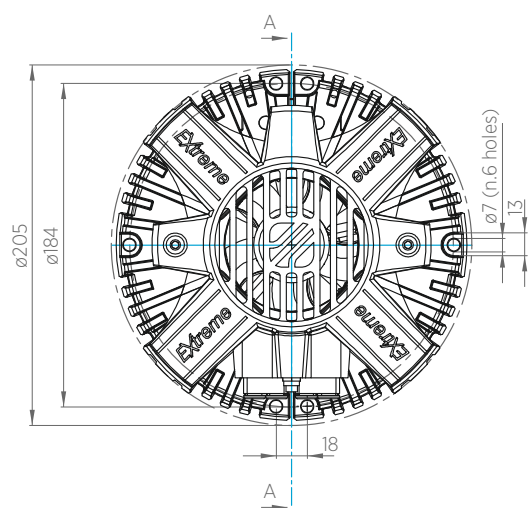


Disc hole D with keys with taperlock
 $\varnothing$ max = $\varnothing 35$ $\varnothing$ max = $\varnothing 30$




Standard caliper

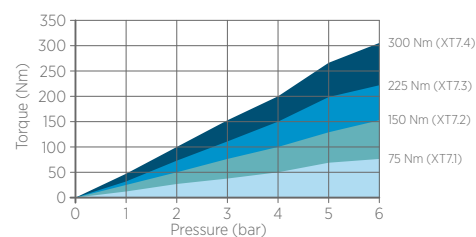

Reduced caliper 40%

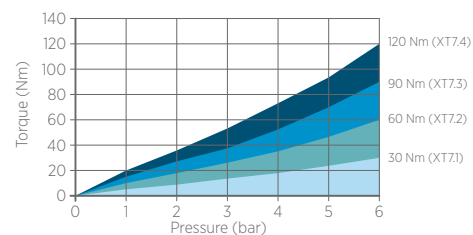

Reduced caliper 15%

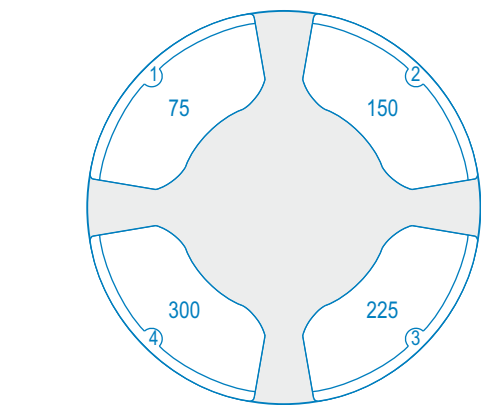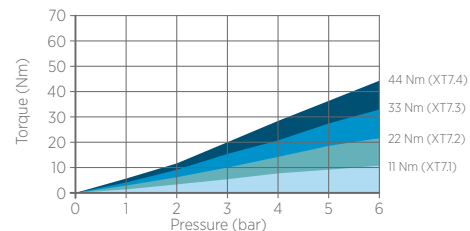

N. of calipers

Torque in Nm relating n. of calipers

TECHNICAL CHARACTERISTICS

Torque max 1 caliper**	standard reduced 40% reduced 15%	75 Nm 30 Nm 11 Nm
Torque min 1 caliper**	standard	1,3 Nm
Pressure min / max		0,3/6 bar
Max disc rpm		2500 rpm
Total weight		6,5 kg
Inertia disc		0,01 Kgm ²
Fan power input		155 W
Heat dissipation with 24V fan		2 kW
Noise level		49 dB

*Data are subject to technical change without notice

** Torque values relate to dynamic slipping



Re S.p.A.
 via Firenze 3
 20060 Bussero (MI) Italy

T +39 02 9524301
 F +39 02 95038986
 E info@re-spa.com

Assistenza tecnica
 Technical support
 T +39 02 952430.300
 E support@re-spa.com

Assistenza commerciale
 Sales support
 T +39 02 952430.200
 E sales@re-spa.com